Ceiling LED Pendant

PD82536-UNV-010

INSTALLATION SHEET

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
 Keep this installation sheet for future reference
- Technical Support: 1-855-855-8926
- **1.** Remove fixture from its original package
- **2.** Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using screws provided (1e) in hardware package
- **4.** Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g)
- **5.** Determine hanging height of fixture by securing rods (2d) to canopy (2a) and fixture (3a) after feeding fixture wires (LED+ and LED-) through rods
- **6.** Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- 7. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided.
- 8. Attach canopy (2a) to mounting plate (1c) with canopy screws (2f)

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC or 0-10V type of dimmer for dimming application
- 120-277V input
- 1f. 1a. Illustration 1 0-10VDIM -1b. 0-10VDIM + 1c. -1q. 1e. 4a. DC Driver 2a. 2f. ow Voltage 2d. 3a.

19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20240605

Ceiling LED Pendant

PD82536-UNV-010

INSTALLATION SHEET

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
 Keep this installation sheet for future reference
- .


Technical Support: 1-855-855-8926

WALL MOUNT OPTION

- **1.** Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f)
- **3.** Separate swivel (5c) from canopy (2a) by removing washer and nut (4b)
- **4.** Attach mounting plate **(1c)** to electrical junction box **(1a)** using screws provided **(1e)** in hardware package
- **5.** Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g)
- **6.** Secure thread (**5a**) to canopy (**2a**) with washer and nut (**4b**), followed by canopy rod (**5b**), swivel (**5c**), fixture rod (**3b**) and fixture (**3a**) after feeding fixture wires (LED+ and LED-) through all components
- 7. Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided
- **9.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2f)

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC or 0-10V type of dimmer for dimming application
- 120-277V input

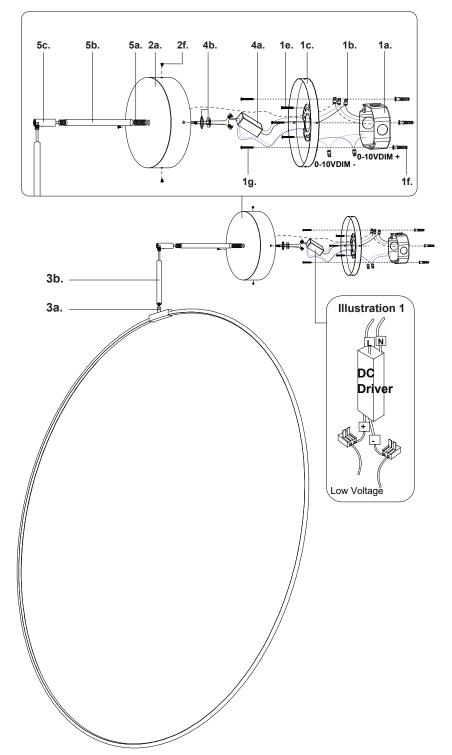

KUZCO

19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20240605