# **ASSEMBLY AND INSTALLATION INSTRUCTIONS**

# **G.** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):		
Fitter Screw (A)	Wire Nut (B)	

## **IMPORTANT:**

T0318

The sensor has an excellent photocell function to enable the light to turn on at dusk and off at dawn automatically.

# Installation Steps

### Turn off the power at fuse or circuit box

- 1. Pull out the wires and grounding wire from the post. Make wire connections using the wire nuts:
  - --- The hot wire (usually balck insulation) from the fixture to the black wire from the post.
  - --- The neutral wire (usually white insulation) from the fixture to the white wire from the post.
  - --- The grounding wire (usually green insulation or bare wire from the fixture to the grounding wire from the post.
  - Carefully put the wires back into the post.
- 2. Place the fitter on the top of the post, and then secure it with fitter screws.


### NOTE: With silicone caulking compound, caulk completely around


where the fitter meets with the post surface to prevent water from seeping into the post.


3. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.

### Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

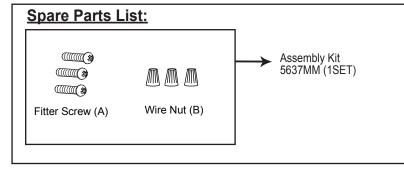

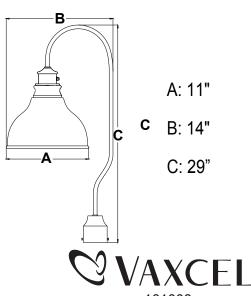

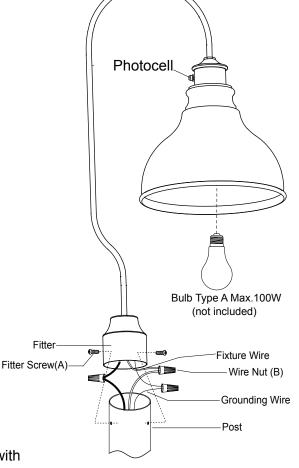

161008